





Model Name	IW06C-ML8-D
Latest Firmware Date	2020 - 04 - 17
Manual Version	Rev. 1.7
Release Date	2020 - 04 - 20

2019 The New Malibu OEM Screen

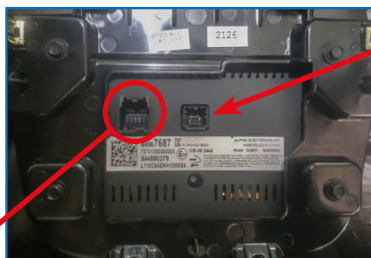

Provided LVDS Cable

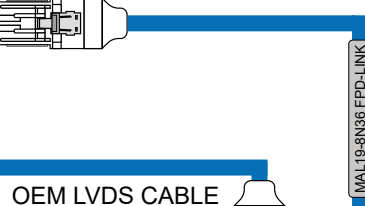


OEM LVDS CABLE



M2C-200IW 유아터치 연동
M2C의 답스위치
1번, 2번 ON

NAVI IN PORT UART TOUCH



Pin # 19 = Uart TX

Connected touch
by HDMI in UART pin

Please Do not connect.
4-pin touch cable at the same time

When you use the HDMI in UART touch

Support Device

- M2C-100IW
- M2C-200IW

※ It is supported from M2C-100IW firmware version 43 or later.

N-LINK II V4




A-LINK



The N-LINK and A-LINK UART touch
Will be connected by Uart port(USB to USB cable)

SCREEN POWER CABLE

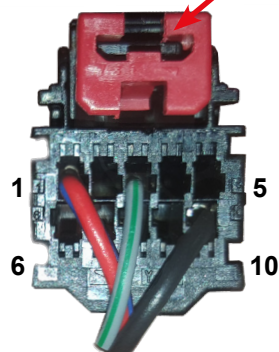


B+ = 1 # PIN
(Red, Blue)

Ground = 10 # PIN
(Black)

SW CAN = 3 # PIN
(Gray, Green)

Steering Wheel Buttons

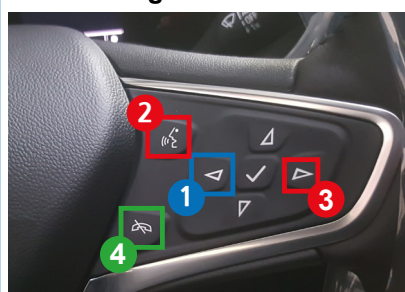




<Malibu, Trailblazer> Activation by original buttons

Button	Function	Operation	Remarks
1	Changing Modes	Press the button 2 seconds	Order : NAVI → OEM
2	Changing Modes	Press the button 2 seconds	Return to the OEM mode in any modes.
3	Changing Modes (Front Cam)	Press the button 2 seconds	Order : AV1 (Front View Camera)
4	Changing Modes (Front Cam)	Press the button short time	Order : AV1 → Previous screen
2	Setting Menu	Press the button 5 seconds more	Used setting menu by touch

<Traverse> Activation by original buttons

Button	Function	Operation	Remarks
2	Changing Modes	Press the button 2 seconds	Order : NAVI → OEM
3	Changing Modes	Press the button 2 seconds	Return to the OEM mode in any modes.
4	Changing Modes (Front Cam)	Press the button 2 seconds	Order : AV1 (Front View Camera)
5	Changing Modes (Front Cam)	Press the button short time	Order : AV1 → Previous screen
2	Setting Menu	Press the button 5 seconds more	Used setting menu by touch


Components

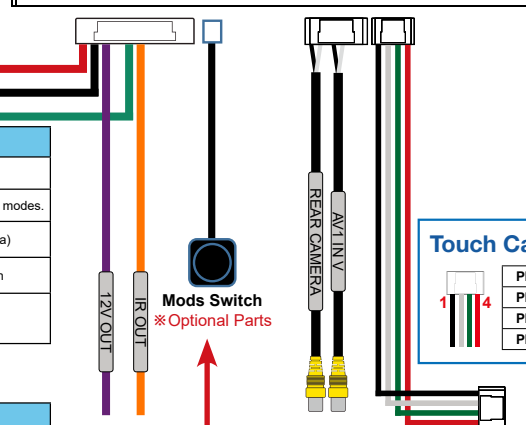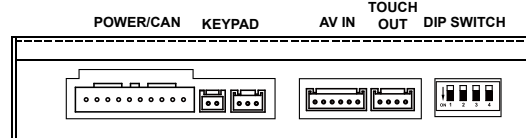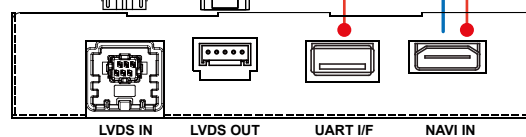

Touch Cable Spec

PIN #1	X -
PIN #2	Y -
PIN #3	X +
PIN #4	Y +

DIP Switch Settings



PIN	ON (▼)	OFF (▲)
1	External Rear View Camera	Original Rear View Mode (OEM CAMERA)
2	External Front View Camera(AV1 Mode)	Skip External Front View Camera(AV1 Mode)
3	Traverse (1280 X 768) <With Navigation option>	Trailblazer 8inch (1280 X 768) <With Navigation option>
4	Malibu 8inch (800 X 480) <Without Navigation option>	Default Set is OFF (▲)

Activation by Mode Switch

Function	Operation	Remarks
Changing Modes	Press the button 2 seconds	Order : OEM → NAVI
Changing Modes	Press the button 2 seconds	Return to the OEM mode in any modes.
Changing Modes (Front Cam)	Press the button Short	Order : OEM → AV1
Changing Modes (Front Cam)	Press the button Short	Return to the OEM mode in any modes.

12V OUT (ACC)

※ Please Never input 12V power



The interface does not support reverse 12V out

2019 The All New New Malibu My Link Power is unstable
When installing rear camera.
You have to wire rear camera power
at the lamp(reverse) power.